

SPECIFICATION



 70t

 47m

 63.5m

SRC700T9

SANY ROUGH TERRAIN CRANE

QUALITY CHANGES THE WORLD

It is one of the core business units in SANY Group, specializing in the development and manufacturing of high-end wheel cranes, crawler cranes and tower cranes, including the complete range of wheel cranes from 8 to 2400t, crawler cranes from 25 to 4500t and tower cranes from 6 to 185t.

三一集团旗下核心事业部，从事高端轮式起重机、履带起重机、塔式起重机系列产品的研发制造。覆盖8-2400吨全吨位轮式起重机，25-4500吨全吨位履带起重机，6-185吨塔式起重机。



SANY CRANE



SRC700T9

SANY ROUGH TERRAIN CRANE
70T LIFTING CAPACITY

A 70t rough terrain crane with five section 47m boom, featuring stronger capacity yet reduced self-weight. Key components come from name brands of reliable quality. Operator comfort is improved by brand new cab design.

一款最大起重量70吨，5节臂，全伸臂长47m的越野起重机，自重轻，性能强。核心部件均为知名供应商提供，质量稳定可靠；配备全新操纵室，驾驶、操作舒适度全面升级。



All new operator's cab

Ergonomic concept of safety and comfort

全新操纵室

操作安全、舒适、人机工程全面升级

Convenient transport

One-trailer transport at low operational cost

超便捷运输

一车整运，运营成本低

Brand-name components

DF Cummins engine/Dana transmission /Kessler axles


国际知名供应商

东风康明斯发动机/德纳变速箱/凯斯兰车桥



All New Operator's Cab

全新操纵室

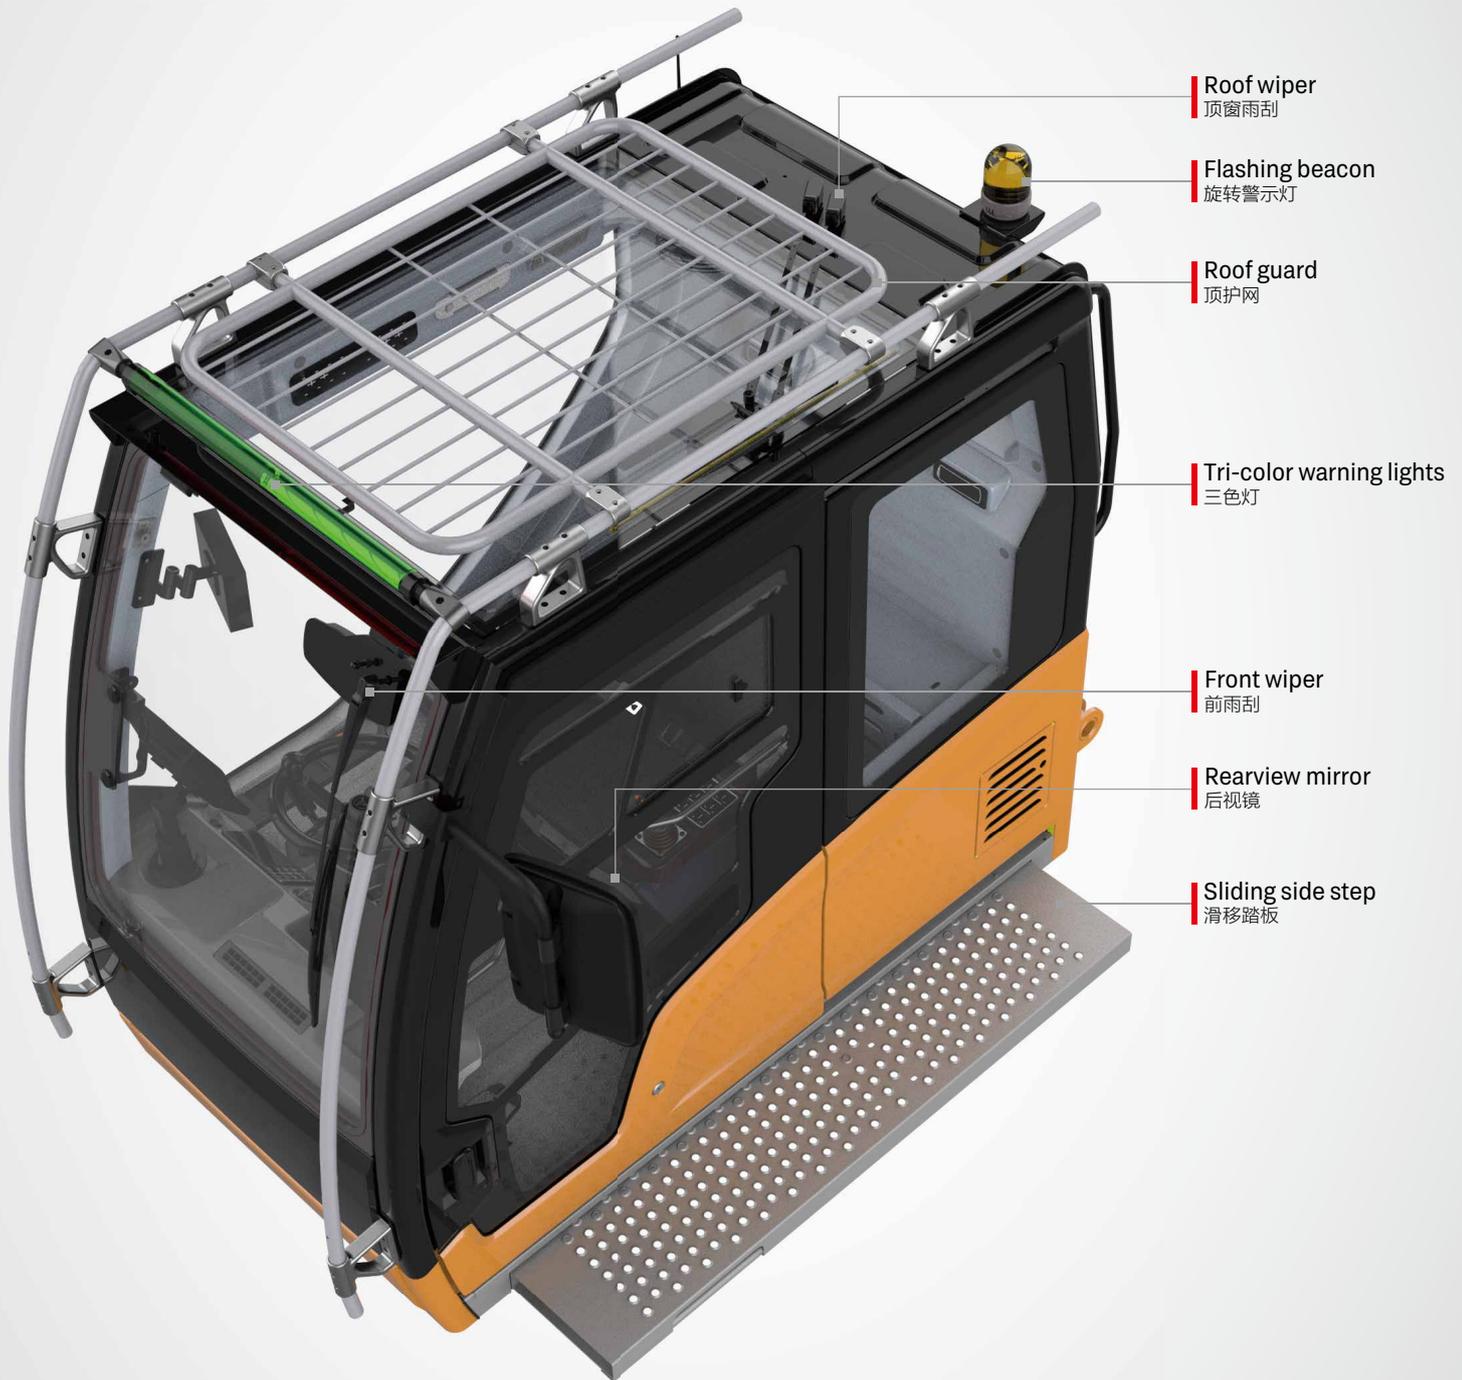

Roof wiper
顶窗雨刮

Flashing beacon
旋转警示灯

Roof guard
顶护网

Tri-color warning lights
三色灯

Front wiper
前雨刮

Rearview mirror
后视镜

Sliding side step
滑移踏板



Safety & Reliability
安全可靠



Comfort & Convenience
舒适便捷



Simplicity & Efficiency
简单高效

SPECIFICATION

Boom telescoping pedal
主臂伸缩踏板

Joystick
手柄

Left control panel
左扶手箱控制面板

Armrest
扶手箱

Right control panel &
LMI navigation knob
右扶手箱控制面板

Rearview and
winch monitor
卷扬监视器

10.1 inch LMI screen
10.1 吋显示屏

Outrigger control
panel
支腿控制面板

Steering column
方向柱

Pedals
踏板布置


Upper control panel
辅助面板

Emergency stop
switch
急停开关

Bubble level
水平仪

Cup holder
水杯托

Joystick
手柄

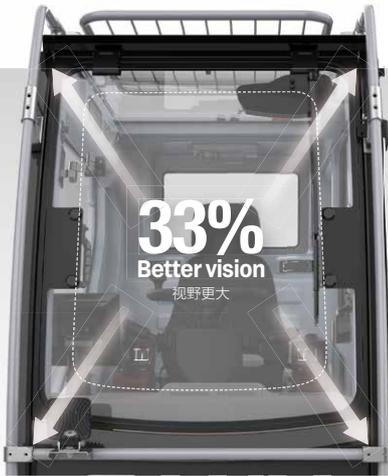

Integrating SUV genes, overall space is enlarged by 10% and forward field of vision is increased by 33%. The front windshield can be opened by 70 degrees, providing better ventilation and a second emergency exit.

融入 SUV 基因, 整体空间增大 10%, 配备超大可开合 70° 前挡风玻璃, 视野提升 33%, 增加空气对流, 并可作为快速逃生通道。



Sliding door transits between tracks when closing to make perfect thermal and acoustical insulation.
侧向变轨, 滑移门完美隔绝外部环境。

Getting in and out is made more convenient with the power sliding side step.
全宽电动伸缩踏板, 超大安全便利进出通道。

SPECIFICATION

Adjustable steering wheel for driving and controlling, modular control panels, and smart user interface deliver intuitive and highly efficient control.

驾控一体的方向盘、模块化控制面板、UI 智能操作界面，操作简单，为高效吊装保驾护航。




Convenient Transport

行驶运输便捷性

Four steering modes

四种转向模型

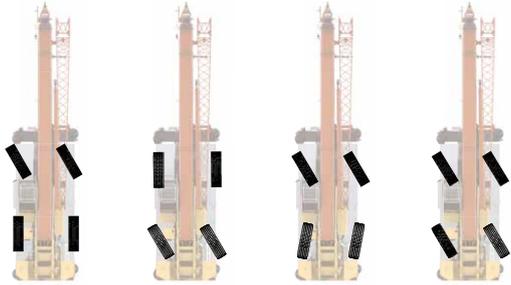

2 wheel front 前轮转向模式

2 wheel rear 后轮转向模式

4 wheel 四轮转向模式

Crab 蟹行模式



Steering control panel
转向控制面板

One-Trailer Transport

一车整运

The basic machine is transported at 49t with counterweight, jib and hooks, 3.3m wide and 3.935m high, satisfying road regulations.

主机运输尺寸为宽 3.3m, 高 3.935m, 重量为 49t (带配重、副臂和吊钩), 满足道路运输要求。



Axle Load Distribution

轴荷分布

Items 项目		Weight (kg) 重量	Load on front axle (kg) 前轴轴荷	Load on rear axle (kg) 后轴轴荷
Basic machine 主机		49000	28800	20200
Remove 移除	Counterweight 配重	7600	3038	-10638
	Fixed jib 副臂	1100	1840	-740
	Aux. boom nose 臂尖滑轮	60	180	-120
	Main hook 主钩 (70t)	720	980	-260
	Auxiliary hook 副钩 (8t)	160	220	-60


Carrier Frame

车架底盘



Inverted trapezoidal variable cross section frame is 5% less in weight and 10% stronger in rigidity.

倒梯形变截面车架，实现车架减重 5% 的同时，刚性提升 10%。

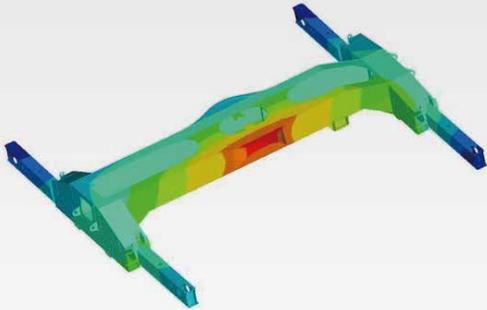


↓ 5%
Weight 重量

↑ 10%
Rigidity 刚性

Power Train

动力系统

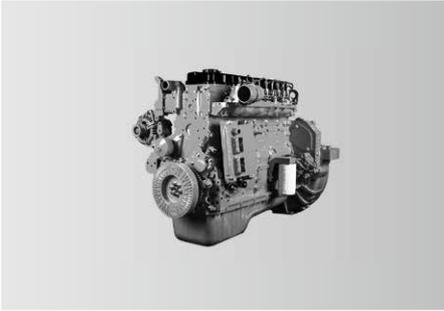


Engine

Power comes from a DF Cummins QSB6.7 inline six-cylinder water-cooled, turbocharged and intercooled off-highway diesel engine, complying with Stage III emission standard. Rated power: 178kW/2200rpm. Max. torque: 970N·m/1500rpm.

发动机

东风康明斯 QSB6.7 三阶段非道路直列六缸水冷、增压中冷柴油发动机。
额定功率 :178kW/2200rpm。
最大扭矩 :970N·m/1500rpm。

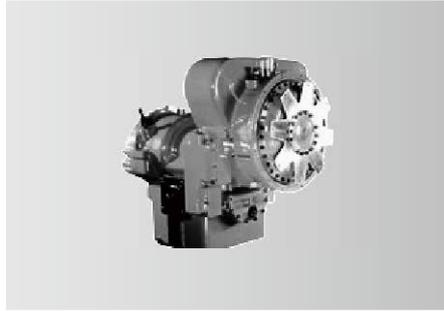


Transmission

Dana electronically controlled auto transmission features 6 speeds forward and 6 speeds reverse, wide ratio range, and smooth gearshift with reduced maintenance cost.

变速箱

德纳全自动电控变速箱,6 个前进挡、6 个后退挡,速比范围大,换挡平顺无冲击,维修保养成本低。

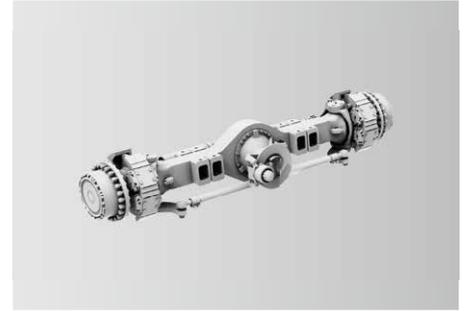


Axle and suspension

Kessler axles, both axles are driven and steered. Front axle is mounted to the frame by independent steel plate, and rear adopts oscillation cylinders with hydraulic lockout. Driving comfort and lateral stability is therefore guaranteed on rough terrains and conditions.

车桥悬挂

凯斯兰车桥,前后桥均为驱动桥和转向桥。前桥采用独立式钢板连接,后桥采用摆动支架式;液压油缸闭锁悬架系统;能适用各种恶劣工况和路面,保证车辆行驶的平顺性和侧翻稳定性,驾驶舒适。

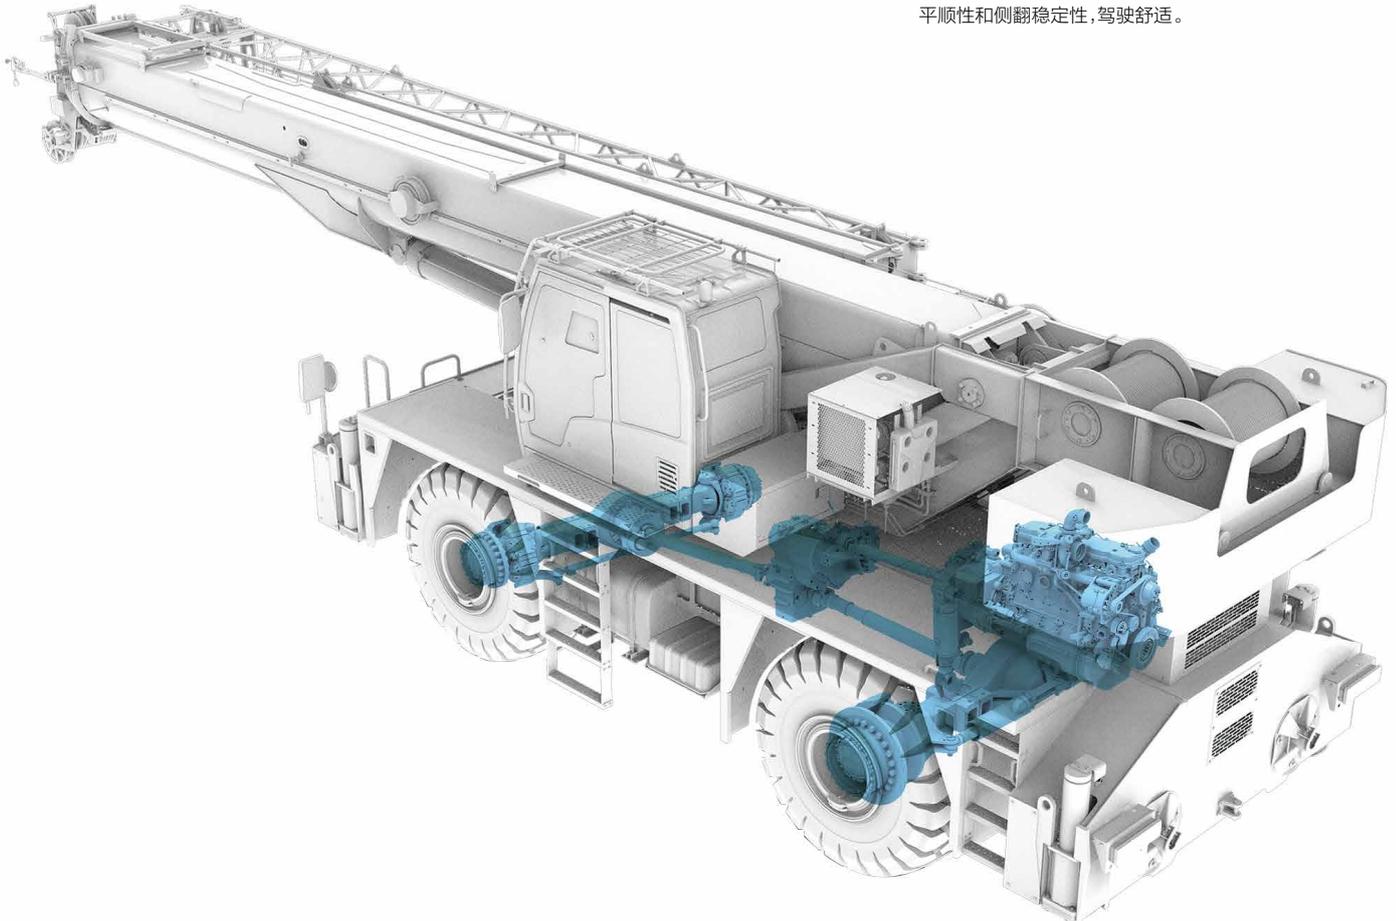

Electrical System

电气系统

Smart CAN-BUS communication system

International advanced CAN-BUS data communication network applied for display, instrument panel, I/O module, joysticks and main sensors, allowing for high-speed data transmission and quick response in less than 20ms.

Cabling

Centralized electric cabinet and heavy-duty connector applied for cabling of superstructure, convenient for maintenance; IP rating up to 67, ensuring high reliability.

Winch camera

Winch cameras equipped for monitoring its working condition and identifying rope disorder in time.

Integrated bus button panel input

Various operating states displayed by button indicator lights, and one-button multi-functional operation realizable by writing various operation modes.

智能总线通信系统

国际先进的分布式集成总线数据通信网络，显示器、显示仪表、I/O 模块、操作手柄、主要传感器等采用 CAN 总线组网，高速信息传输、响应速度小于 20ms。

电缆布线

上车电缆布线采用集中式分线盒及重载接插件，维护方便；防护等级 IP67，可靠性高。

卷扬监控系统

卷扬摄像头监视卷扬工作及及时发现乱绳的情况。

集成总线按键面板输入

可通过按键指示灯显示各种工作状态，通过写入多种操作模式实现一键多功能。



Centralized electric cabinet
集中式电控箱



Anti-two-block switch
高度限位器



Third wrap indicator
三圈保护器



Cable reel
电缆卷筒



Anemometer (optional)
风速仪 (选配)

Multi-functional screen

Large 10.1 inch HD touch screen display with all new interface. Incorporated crane setup, load charts, working conditions, working period, virtual wall, Bluetooth, radio and diagnostics with an additional navigation knob.

Precise load moment indicator


SANY independently developed LMI, accuracy of 0 ~ 5%.

高新多功能显示屏

采用 10.1 寸高清显示屏, 全新操作界面, 可实现触摸与旋钮多种方式操控。工况、力矩、发动机、变速箱、控制器 IO 点、工作时间统计等丰富的设备状态信息呈现, 集成虚拟墙、蓝牙、收音机等多种扩展功能。

精准力限器系统


三一自主研发的力矩限制器系统, 精度达 0~5%。

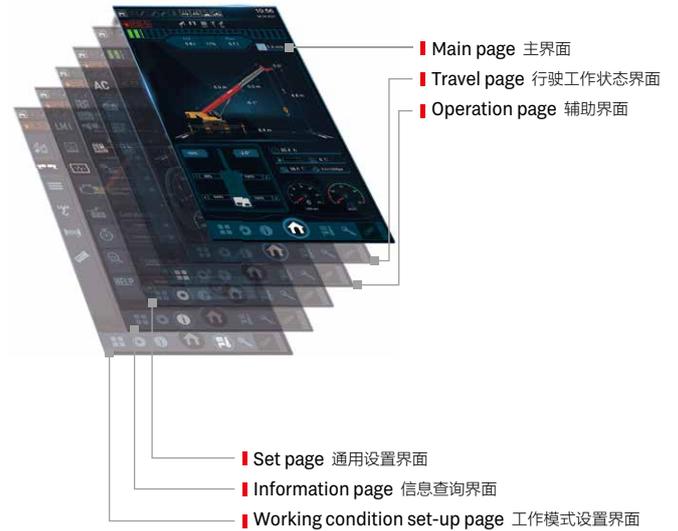

MachineLink⁺

ROOTCLOUD T-AMS Pro device comes as standard to realize GPS trajectory, machine status, maintenance management, E-fence, alarm management, and operator management on computer or mobile MachineLink+ platform, by remote control of cranes. This telematics package greatly boosts efficiency of customer fleet management and helps provide better after-sales services.

标配树根物联终端 T-AMS Pro, 通过对起重机设备的远程控制, 在电脑或移动端 MachineLink+ 平台实现轨迹回放、设备状态、维保设备、电子围栏、报警管理、操作手管理等功能, 极大提高客户设备管理效率, 提升三一售后服务能力。

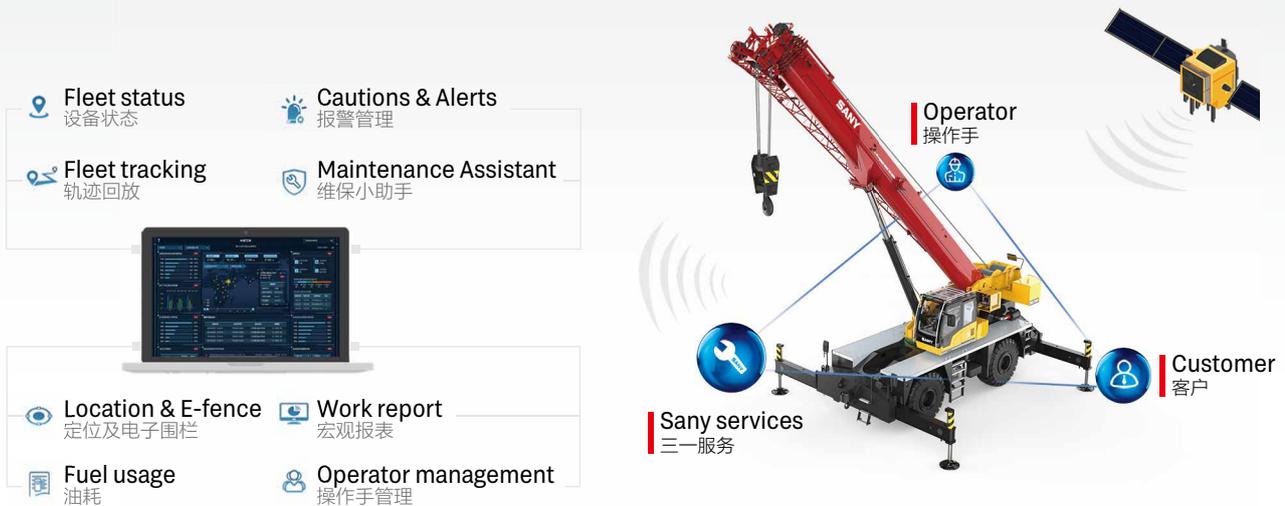

Hydraulic System

液压系统

Four boom sections extended by double cylinder with rope arranger, 2nd boom extended by cylinder I, 3rd -5th sections telescoped by cylinder II with rope pull. Synchronized telescoping of variable lengths for more applications with higher efficiency.

5 节主臂, 双缸绳排, 一号油缸和钢丝绳伸 2 节臂, 二号油缸和钢丝绳伸 3、4、5 节臂, 可实现同步伸缩, 臂长任意组合, 省时省力。



Superstructure

上车

Open-type electronically controlled load-sensing system and dynamic slewing brake system.
Electro proportional compensated passive luffing-down system applied to control the luffing speed, making luffing more reliable and stable.

Dynamic slewing brake realizing precise control of slewing speed.

Electronically controlled load-sensing hydraulic system, electronic joystick and electronic throttle, ensuring easy operation and more accurate control and millisecond-level action response speed, with min. single-rope hoisting speed 0.8m/min, and distribution difference in case of combined motions 8%.

通过开式电控负载敏感系统和动态回转制动系统；

电比例自重落幅系统控制落幅速度, 更可靠更平稳；

具备动态回转制动功能, 可实现回转速度精准控制；

电控负载敏感液压系统, 采用电手柄、电油门控制, 轻松操作的同时, 控制更精准；动作响应毫秒级速度；卷扬单绳最低速度 0.8m/min；复合动作分配误差 8%。

Chassis

下车

Steering system

A gear pump installed to supply oil for hydraulic steering, steering pressure controlled by electro-proportional relief valve, four steering modes realized by solenoid directional valve.

Suspension system

Different modes including normal driving and Pick & Carry with suspension locked, suspension to be locked when the crane is working.

Outrigger telescoping system

The electro proportional relief valve identifies pressure staging of outrigger telescoping, satisfying operation requirements under high pressure and forming protection under limited pressure.

转向系统


液压转向系统采用齿轮泵提供油源,通过电比例溢流阀精确控制转向压力,通过电磁换向阀实现前轮转向,后轮转向,全轮转向和蟹行转向共计四种转向模式。

悬挂系统

悬挂系统通过选择不同的悬挂模式可以实现正常行驶和锁定模式下的带载行驶;在起重机上车作业时能够对悬挂进行锁定。



支腿伸缩系统

支腿伸缩采用电比例溢流阀对支腿伸缩进行压力分级,既满足高压动力动作需求,也可满足限压保护功能。

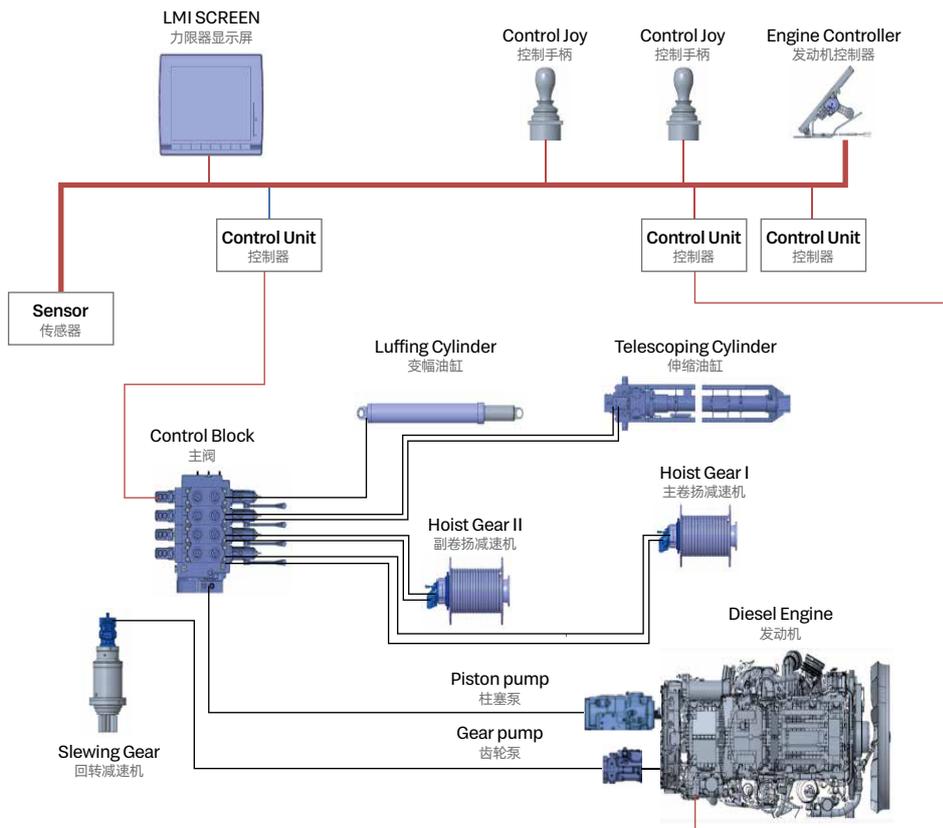

Overall Dimensions

整机尺寸

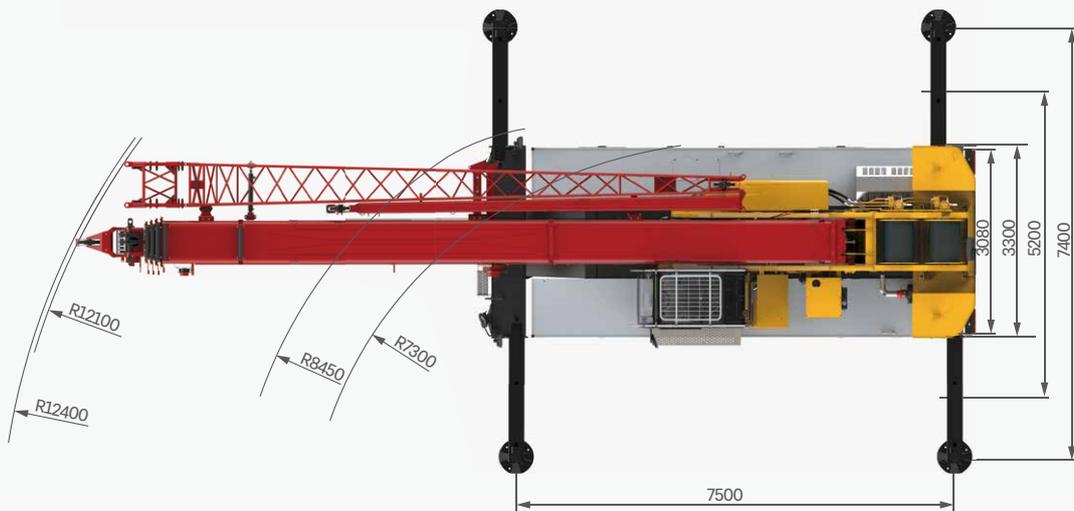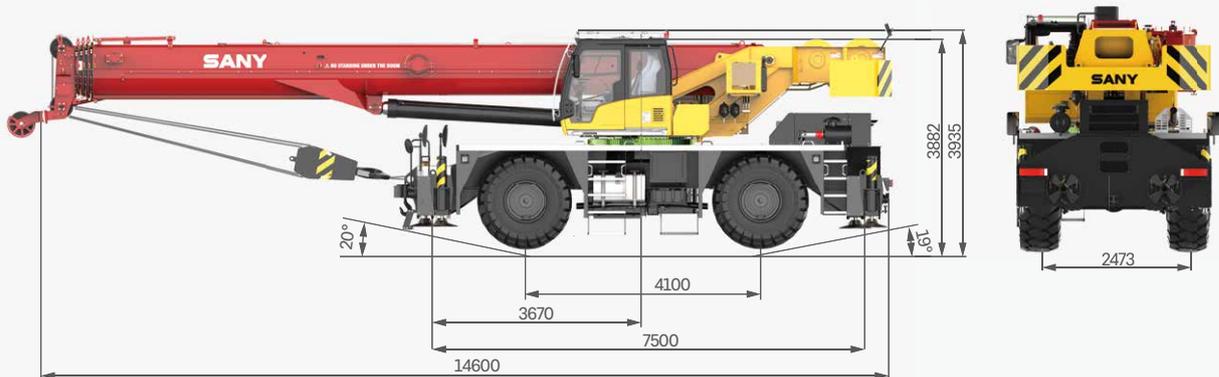

Technical Specification

整机参数

CATEGORY 类型	ITEM 项目	UNIT 单位	VALUE 参数	
CAPACITY 额定起重量	Max. lifting capacity 最大起重量	t	70	
WEIGHT 重量参数	Gross weight 整机总质量	kg	49000	
POWER 发动机参数	Engine model 发动机型号	-	QSB6.7 (stage III)	
	Max. engine power 发动机最大功率	kW/rpm	178/2200	
	Max. engine torque 发动机最大输出扭矩	N·m/rpm	970/1500	
DIMENSIONS 尺寸参数	Overall length 整机全长	mm	14600	
	Overall width 整机全宽	mm	3300	
	Overall height 整机全高	mm	3935	
TRAVEL 行驶参数	Max. travel speed 最高行驶速度	km/h	36	
	Steering radius 转弯半径	Min.steering radius 最小转弯半径	m	14/7.6
	Wheel formula 车轮模式	-	4 × 2; 4 × 4	
	Min.ground clearance 最小离地间隙	mm	510	
	Approach angle 接近角	°	20	
	Departure angle 离去角	°	19	
	Max.gradeability 最大爬坡度	-	75%	
	Fuel consumption per 100km 每 100 公里油耗	L	85	
MAIN PERFORMANCE 主要性能参数	Working temperature range 使用温度区间	℃	-40~+46	
	Min.rated lifting radius 最小额定幅度	m	3	
	Tail slewing radius 转台尾部回转半径	m	4.45	
	Boom sections (Qty.) 臂节数	-	5	
	Boom shape 臂形状	-	U shape U型	
	Max.lifting moment 最大起重力矩	Basic boom 基本臂	kN·m	2360
		Full-extension boom 全伸主臂	kN·m	1254
		Full-extension boom + jib 全伸主臂 + 副臂	kN·m	554
	Boom length 臂长	Basic boom 基本臂	m	12.2
		Full-extension boom 全伸主臂	m	47
		Full-extension boom + jib 全伸主臂 + 副臂	m	63.5
	Max.lifting height 最大起重高度	Basic boom 基本臂	m	12.7
		Full-extension boom 全伸主臂	m	47.5
		Full-extension boom + jib 全伸主臂 + 副臂	m	63.5
Outrigger span (Longitudinal × Transverse) 支腿跨距 (纵 × 横)	m	7.5 × 7.4		
Jib offset 副臂安装角度	°	0, 15, 30		
AIRCONDITIONER 空调	In operator's cab 上车空调	-	Heating & cooling 制冷、制热	

Technical Specification

整机参数



Hook 吊钩

Rated load 额载 /t	Number of sheaves 滑轮数量	Rope rate 倍率	Hook weight/kg 吊钩重量
70	6	12	720
8	-	1	160



Operations 主要动作参数

Item 项目	Max.single rope lifting speed (empty load) 单绳速度 (空载)	Rope diameter/length 钢丝绳直径 / 长度	Max. single line pull 最大单绳拉力
Main winch 主卷扬	145m/min	Φ19mm/230m	6.6t
Auxiliary winch 副卷扬	145m/min	Φ19mm/135m	6.6t
Slewing speed 回转速度	2r/min		
Full luffing up/down time of boom 主臂起落幅时间	70s/80s		
Full extension/retraction time of boom 主臂伸缩时间	95s/110s		
Outrigger jack 垂直支腿	Extend 伸	35s	
	Retract 缩	40s	
Outrigger beam 水平支腿	Extend 伸	30s	
	Retract 缩	35s	

Crane Introduction

整机介绍

Carrier 下车

Carrier frame 车架

- Double longitudinal beam construction welded by high strength steel plate, higher bearing capacity.
- 车架为高强度钢板焊接而成的双纵梁结构，承载能力强。

Engine 发动机

- Model: QSB6.7 inline six cylinder, direct injection diesel, 4 cycle, turbo charged and after cooled.
- Rated Power: 178kW/2200rpm.
- Emission standard: stage III.
- Fuel reservoir capacity: 350L.
- 型号: QSB6.7 直列六缸、水冷却、增压中冷、4 冲程循环、柴油发动机。
- 额定功率: 178kW/2200rpm。
- 排放标准: 符合 III 阶段。
- 油箱容积: 350L。

Transmission 变速箱

- DANA automatic gearbox, 6 forward and 6 reverse speeds (3 speeds high and 3 speed low).
- 德纳自动变速箱，6 个前进挡，6 个后退挡，（3 挡高速，3 挡低速）。

Axle 车桥

- Front Axle: Drive/steer with differential and planetary reduction, service and parking brake.
- Rear Axle: Drive/steer axle with differential and planetary reduction, service brake.
- 前桥: 驱动转向，行星减速机，配有轮间差速锁，行车和驻车制动。
- 后桥: 驱动转向，行星减速机，配有轮间差速锁，行车制动。

Suspension system 悬挂

- Front Suspension: Rigid mounted to frame.
- Rear Suspension: Pivot mounted with hydraulic lockout device.
- 前桥刚性连接，后桥带油缸锁定枢轴摆动悬挂。

Tires 轮胎

- Bias ply tires sized 29.5-25.
- 29.5-25 斜交胎。

Brake 制动系统

- Full hydraulic double-circuit brake system. Service brake on all wheels, parking brake on front wheels.
- 双回路液压制动，行车制动作用于前后轮，驻车制动作用于前轮。

Outrigger 支腿

- H-type telescoping outrigger, 4-point support, with span (longitudinal × transverse) 7.5m × 7.4m.
- 采用 H 形伸缩支腿，4 点支撑，纵、横跨距 7.5m × 7.4m。

Steering 转向系统

- Full hydraulic independent power steering. Steering type: front wheel, rear wheel, four wheel and crab.
- 独立液压助力转向，四种转向模式：前轮，后轮，全轮，蟹型。

Crane Introduction

整机介绍

superstructure 上车

Operator's cab 操纵室

- New generation T-series operator's cab features curved-rail sliding door, safety glass and corrosion resistant steel construction with softened interior trim. Large internal space with panoramic skylight, adjustable seat and other user-friendly design incl. A/C, electric wiper, making it more comfortable and easier to work. The LMI screen is equipped to realize the logic integration of the control console and the display, so that all working data can be seen at a glance.
- 全新一代 T 系列操纵室，带变轨滑移门，配备安全玻璃，耐腐蚀钢板，配置软化内饰、超大内部空间、可调式座椅等人性化设计，配有空调、电动雨刮器，操作更舒适、轻松；配置力矩限制器显示屏，实现主控台与操作显示系统有机结合，使吊装作业的全部工况数据一目了然。

Boom system 臂架系统

- Boom: Five-section, basic boom 12.2m, full-extension 47m, made of high-strength welded structural steel with U-shape cross-section.
- Jib: Two-stage, 9.2m/16m, offset at 0°, 15°, 30°.
- 主臂：五节臂，基本臂 12.2m，全伸臂 47m，由高强度焊接结构钢制成，U 形截面。
- 副臂：两节副臂，分别为 9.2m 和 16m，安装角度为 0°，15°，30°。

Slewing platform 转台结构

- SANY independently developed, made of fine grain high strength steel in optimized structure.
- 三一自主设计，结构更优化，由细晶粒高强度钢制成。

Hydraulics 液压系统

- Load sensing variable piston pump can adjust displacement in real time to achieve high precision flow control, greatly reducing energy loss.
- Winch adopts electronically controlled variable motor with high operation efficiency. Max. single rope speed of main winch is 145m/min, and auxiliary winch 145m/min.
- Slewing system integrating slewing buffer and free swing technology, start & brake process is smoother and the inching motion performance is ever better.
- 采用负载敏感变量柱塞泵，能实时调节油泵排量，实现高精度的流量控制，极大的降低能量损耗。
- 卷扬采用电控变量马达，作业效率高；主卷扬单绳速度最大达 145m/min，副卷扬单绳速度最大达 145m/min。
- 回转系统带集成回转缓冲阀，具有自由滑转功能，回转启动和控制平稳，微动性卓越。

Hoist 起升机构

- Main winch and aux. winch adopt planetary reduction with variable displacement motor, featuring high speed and low speed control. Non-rotation high strength wire rope is used.
- 主副卷扬采用行星减速机和变量马达，分高低速控制。配备防旋转高强度钢丝绳。

Low temperature package 低温装置

- Low-temp steel, low-temp cylinders, low-temp seals, engine water-cooled heater, transmission heater, battery heater, double independent heaters for operator's cab, -40°C grease, antifreeze, and hydraulic oil heater are applied to ensure well-functioning in bitterly cold temperatures.
- 低温钢、低温油缸、低温密封件、发动机水冷加热器，变速箱加热，电池加热；操纵室主副独立加热器，-40°C 低温油脂，低温防冻液，液压油箱加热器。

Luffing system 变幅系统

- Double acting single rod hydraulic cylinder with holding valve, luffing angle: -2°~80°. Passive luffing down, reducing energy consumption, improving luffing stability.
- 双作用单活塞杆液缸，带安全平衡阀，变幅角度：-2°~80°，采用自重落幅系统，降低能耗，提高落幅操作的平稳性。

Slewing 回转系统

- 360° slewing in both directions, max. speed 2r/min. It adopts hydro proportional speed control for stable movement and system reliability. Slewing balance valve fitted to ensure smooth braking.
- 360° 转动，最大回转速度 2r/min。液控比例调速控制，动作稳定，系统可靠。回转缓冲设计，制动更平稳。

Counterweight 配重

- Fixed block 7.6t.
- 固定配重 7.6t。

Safety equipment 安全装置

- Load moment indicator: Analytical mechanics is applied and moment limiter calculation system based on the hoisting mechanics model is established. Through online empty-load calibration, the rated accuracy can reach 0-5% to fully protect the hoisting operation. In case of overload, the system will automatically give an alarm to guarantee safety operation.
- The hydraulic system includes balance valve, relief valve, and two-way holding valve to realize system stability and reliability.
- The main and auxiliary winches are equipped with third-wrap indicators to prevent over-raise of the wire rope.
- Boom head and jib head are equipped with A2B switches to prevent the wire rope from over winding.
- The length & angle sensor and pressure sensor are equipped to signify working status in real time, automatically stopping hazardous actions with buzzer alarm.
- 力矩限制器：采用分析力学方法，建立了基于吊重力学模型的力矩限制器计算系统，通过在线空载标定，额定吊重精度达到 0-5%，全方位保护吊载作业；超载作业时，系统自动报警提示，为操纵作业提供安全保障。
- 液压系统配置平衡阀、溢流阀、双向液锁等元件，实现液压系统稳定可靠。
- 主、副卷扬配置三圈保护器，防止钢丝绳过放。
- 主、副臂端配置高度限位器，防止钢丝绳过卷。
- 配置长度角度传感器、压力传感器，实时显示起重机作业状态，自动切断危险动作，蜂鸣报警。

Optional equipment at extra fees 选配

- Anemometer / Boom tip camera / Reversing radar / Air intake shutoff valve / Spark arrester / Slewing buzzer / Navigation beacon / Desert tires / Inflator / Customized painting.
- Other equipment available upon request.
- 风速仪 / 臂头摄像头 / 倒车雷达 / 进气切断阀 / 火星灭火器 / 回转蜂鸣器 / 航标灯 / 沙漠胎 / 打气泵 / 特殊涂装。
- 其他选配视需求定。

Working Conditions

工况组合




Telescopic boom on outriggers
主臂、支腿吊载

Fixed jib on outriggers
固定副臂、支腿吊载

Telescopic boom on tires
主臂、轮胎吊载

Operating Range - Telescopic Boom

起升高度曲线 - 主臂

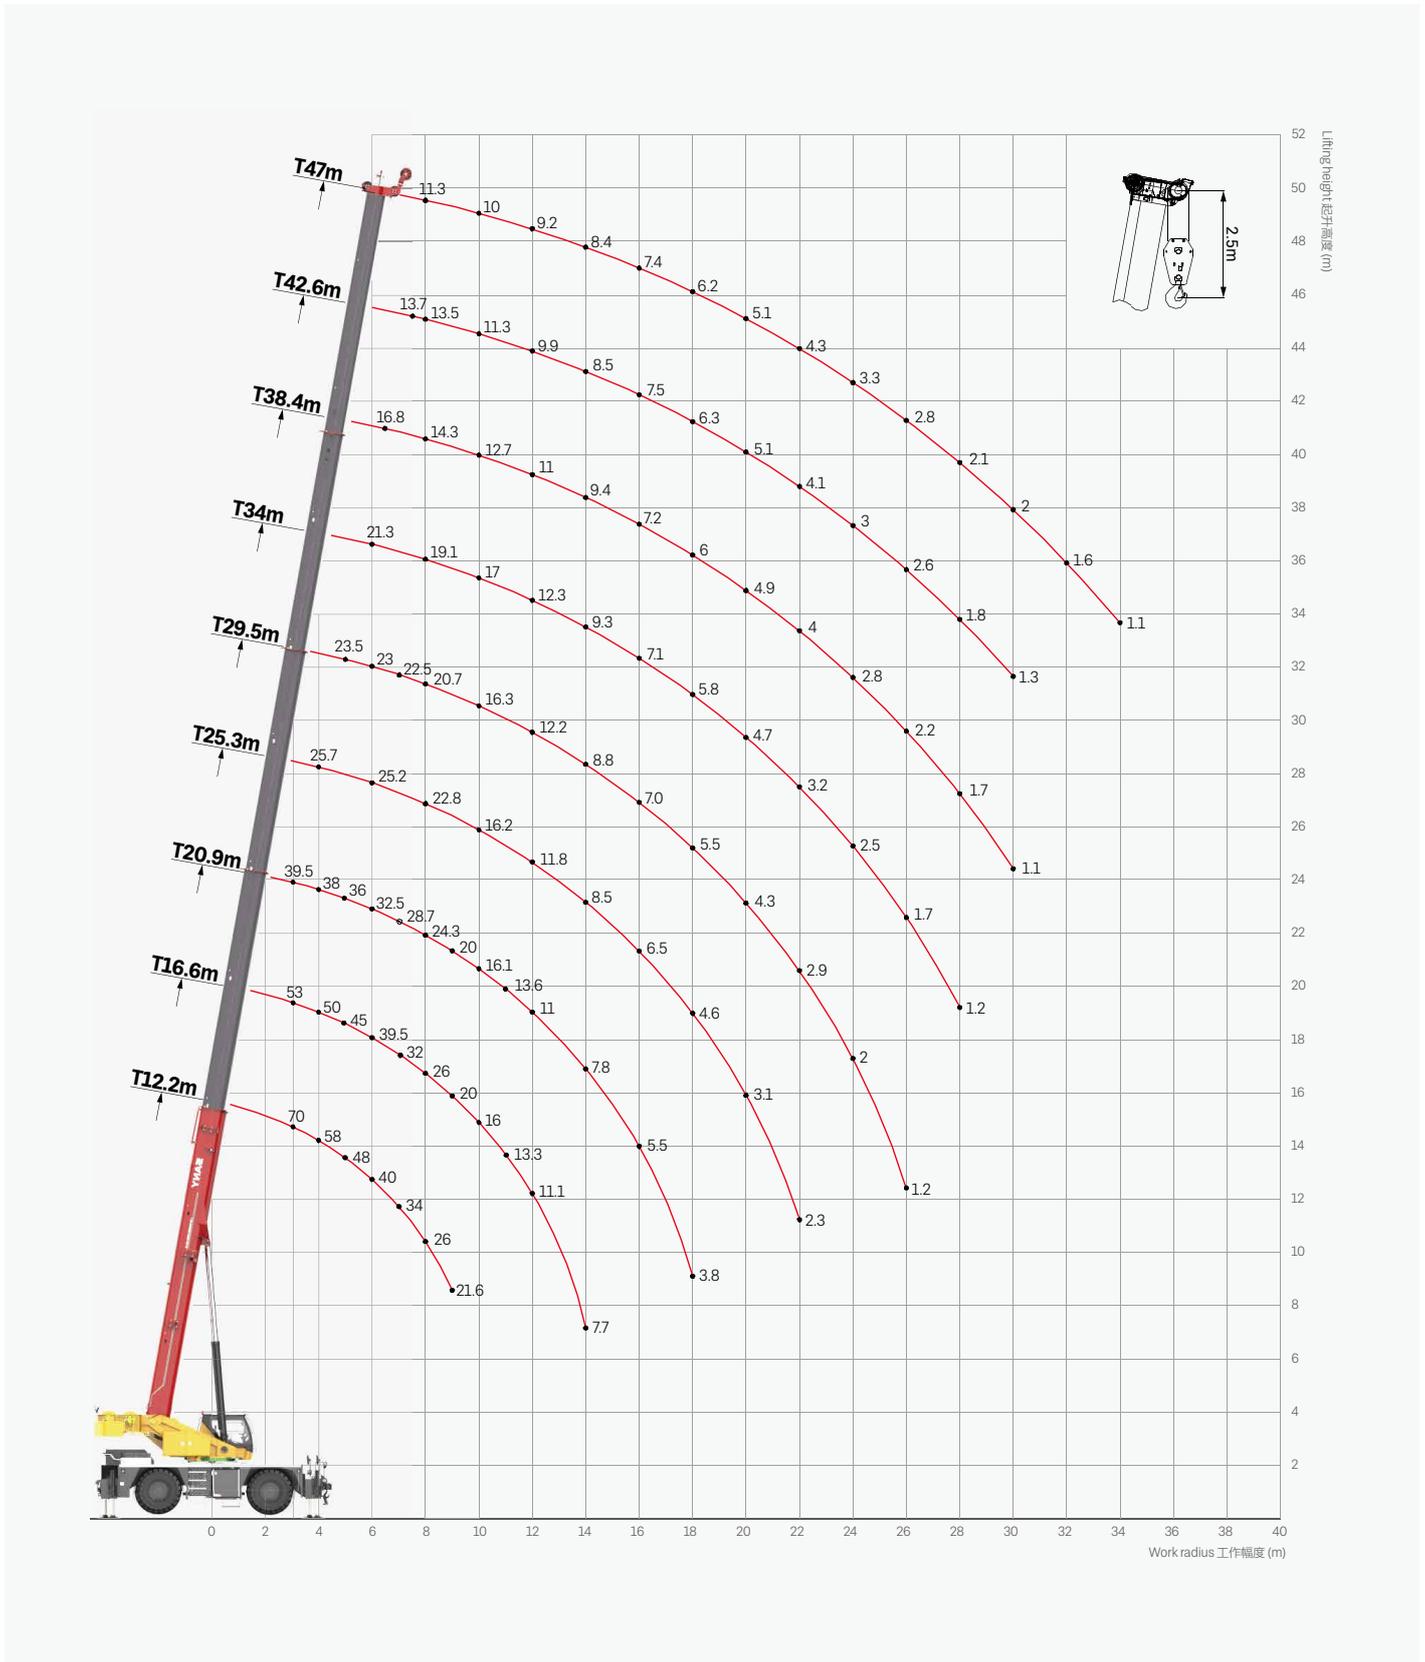

Load Chart-Telescopic Boom

性能表 - 主臂

Unit: kg



 m	12.2	16.6	20.8	25.3	29.7	33.9	38.3	16.6	21.0	25.2	 m
3.0	70000	30000	27500					53000	29100		3.0
3.5	65000	29500	27000					51500	28800		3.5
4.0	58000	29000	26500	24000				50000	28200	24800	4.0
4.5	53000	28500	26000	23500				48000	27500	24800	4.5
5.0	48000	28000	25500	23000	18800			45000	27000	24800	5.0
5.5	43800	27500	25000	22500	18500			42500	26500	24800	5.5
6.0	40000	27000	24500	22000	18000	17400		39500	26000	24800	6.0
6.5	36800	26400	24000	21500	17800	17200	12500	35500	25500	24000	6.5
7.0	34000	26000	23500	21000	17200	16800	12300	32000	25000	23600	7.0
7.5	31700	25000	23000	20500	16800	16200	12100	29000	24200	22500	7.5
8.0	26000	23600	22000	20000	16200	16000	11800	26000	22800	21500	8.0
9.0	21600	21000	20500	19800	15000	14800	11500	20000	20500	20700	9.0
10.0		18500	19200	18500	13800	13600	11000	16000	17200	17900	10.0
11.0		15700	16600	16200	12800	12600	10200	13300	14800	15200	11.0
12.0		13200	14200	14000	11800	11500	9600	11100	12400	12800	12.0
14.0		9800	10500	11200	10500	10500	8900	7700	8300	9600	14.0
16.0			8300	8600	8700	8500	7900		6000	7000	16.0
18.0			6500	6800	6900	7000	6700		4200	5000	18.0
20.0				5500	5800	6000	6000			3800	20.0
22.0				4400	4600	5100	5100			2600	22.0
24.0					3800	4300	4300				24.0
26.0					3200	3400	3700				26.0
28.0						2900	3000				28.0
30.0						2200	2300				30.0
32.0							1900				32.0
34.0							1500				34.0
36.0							1100				36.0
	12	6	6	4	4	4	4	10	6	4	
	2#	0	0	0	0	0	0	50	50	50	2#
	3#	0	17	33	50	67	83	100	0	17	33
	4#	0	17	33	50	67	83	100	0	17	33
	5#	0	17	33	50	67	83	100	0	17	33
	0	0	0	0	0	0	0	0	0	0	
	18000	8000	6000	4500	2500	1500	1000	9000	4500	3500	

Load Chart-Telescopic Boom

性能表 - 主臂

Unit: kg



	29.6	34.0	38.2	42.7	20.9	25.3	29.5	34.0	38.4	42.6	47.0		
3.0					39500							3.0	
3.5					39000							3.5	
4.0					38000	25700						4.0	
4.5					37000	25600						4.5	
5.0	23300				36000	25500	23500					5.0	
5.5	23100				34000	25400	23300					5.5	
6.0	22500	17900			32500	25200	23000	21300				6.0	
6.5	22000	17600	15300		30500	25000	22800	21000	16800			6.5	
7.0	21500	17200	15000		28700	24500	22500	20500	16500			7.0	
7.5	21200	17000	14400	12200	26800	24000	22000	19800	15400	13700		7.5	
8.0	21000	16500	13800	12000	24300	22800	20700	19100	14300	13500	11300	8.0	
9.0	20600	15000	12600	11500	20000	18800	18500	18300	13200	12400	11000	9.0	
10.0	17000	14000	11500	11000	16100	16200	16300	17000	12700	11300	10000	10.0	
11.0	14600	13000	11000	10800	13600	13700	13900	14300	11600	10700	9600	11.0	
12.0	13000	12000	10600	10400	11100	11800	12200	12300	11000	9900	9200	12.0	
14.0	9800	10400	9200	9000	7800	8500	8800	9300	9400	8500	8400	14.0	
16.0	7700	8200	8000	7800	5500	6500	7000	7100	7200	7500	7400	16.0	
18.0	6300	6400	6500	6500	3800	4600	5500	5800	6000	6300	6200	18.0	
20.0	4800	5300	5400	5600		3100	4300	4700	4900	5100	5100	20.0	
22.0	3700	4400	4500	4700		2300	2900	3200	4000	4100	4300	22.0	
24.0	2800	3500	3700	3900			2000	2500	2800	3000	3300	24.0	
26.0	2000	2800	2900	3200			1200	1700	2200	2600	2800	26.0	
28.0		2300	2500	2600				1200	1700	1800	2100	28.0	
30.0		1600	2000	2100					1100	1300	1600	30.0	
32.0			1500	1600							1100	32.0	
34.0			1000	1200								34.0	
	4	4	4	4	8	4	4	4	4	3	3		
	2#	50	50	50	50	100	100	100	100	100	100	2#	
	3#	50	67	83	100	0	17	33	50	67	83	100	3#
	4#	50	67	83	100	0	17	33	50	67	83	100	4#
	5#	50	67	83	100	0	17	33	50	67	83	100	5#
	0	0	18	31	0	0	0	26	32	40	42		
	2000	1000	1000	800	4000	2000	1500	800	800	800	800		

Load Chart-Telescopic Boom

性能表 - 主臂

Unit: kg



	12.2	16.6	20.8	25.3	29.7	33.9	38.3	16.6	21.0	25.2	
3.0	58000	26000	23500					43000	24500		3.0
3.5	52000	25000	23100					41000	24000		3.5
4.0	48000	23000	22000	21000				39000	23000	21500	4.0
4.5	43000	22000	21000	20500				35000	22000	21000	4.5
5.0	35000	21000	20000	19000	17100			29000	21000	20500	5.0
5.5	29000	20000	18900	17900	16000			25000	20000	19500	5.5
6.0	24500	19000	17800	16800	15000	15600		21500	19000	18500	6.0
6.5	21000	17800	16800	15700	14000	13700	11500	18800	17500	17000	6.5
7.0	18200	16500	15800	14700	13500	12500	11300	16500	15800	15700	7.0
7.5	16000	15500	14700	13800	12600	11500	11000	14700	14500	14300	7.5
8.0	13500	14200	13700	13100	12000	10700	10500	12900	13000	13300	8.0
9.0	10800	11800	11700	11600	10600	10000	9500	10000	10500	11000	9.0
10.0		9900	10000	9900	9600	8700	8500	8000	8700	9200	10.0
11.0		7700	8200	8400	8300	8100	8000	6000	7300	7800	11.0
12.0		6200	7000	7200	7500	7400	7300	4700	6100	6800	12.0
14.0		4000	5200	5500	5600	6000	5800		4200	4800	14.0
16.0			4000	4200	4400	4900	4700		2900	3500	16.0
18.0				3000	3400	3800	3600			2500	18.0
20.0				2000	2300	2900	2800			1800	20.0
22.0					1700	2100	2200				22.0
24.0					1200	1600	1700				24.0
26.0						1100	1200				26.0
	10	4	4	4	4	4	4	8	4	4	
2#	0	0	0	0	0	0	0	50	50	50	2#
3#	0	17	33	50	67	83	100	0	17	33	3#
4#	0	17	33	50	67	83	100	0	17	33	4#
5#	0	17	33	50	67	83	100	0	17	33	5#
	0	0	0	0	27	33	42	0	0	22	
	10000	3500	2500	1500	1000	800	800	3500	1500	1000	
	80	80	80	80	80	80	80	80	80	80	

Load Chart-Telescopic Boom

性能表 - 主臂

Unit: kg



	29.6	34.0	38.2	42.7	20.9	25.3	29.5	34.0	38.4	42.6	47.0	
3.0					34000							3.0
3.5					33000							3.5
4.0					32000	23000						4.0
4.5					30000	22500						4.5
5.0	20000				27000	22200	22000					5.0
5.5	19000				24000	21500	21000					5.5
6.0	17800	16500			20500	19500	19000	17600				6.0
6.5	16800	14800	12500		18000	17800	17500	16800	14900			6.5
7.0	15500	13700	12100		16000	15800	15700	15500	14500			7.0
7.5	14200	12600	11500	9700	14100	14200	14300	14000	13000	11300		7.5
8.0	13200	11600	11000	9100	12500	12900	13000	12800	11800	11000	8800	8.0
9.0	10900	10000	9800	8500	10000	10400	10500	10600	10000	9800	8000	9.0
10.0	9000	8800	8600	8000	8200	8600	8800	9000	8600	8500	7500	10.0
11.0	8100	7900	7800	7500	6500	7300	7400	7700	7500	7400	7000	11.0
12.0	7000	6800	6700	6600	5200	5800	6000	6300	6600	6500	6400	12.0
14.0	5000	5300	5200	5100	3100	3800	4200	4500	4600	5000	4900	14.0
16.0	3600	3900	4200	4100	1800	2500	2600	3300	3400	3800	3900	16.0
18.0	2600	2800	3300	3200		1600	1800	2200	2400	2600	2800	18.0
20.0	1900	2200	2300	2400		1000	1200	1600	1800	1900	2000	20.0
22.0	1200	1600	1700	1800				1100	1200	1300	1600	22.0
24.0		1100	1200	1300							1200	24.0
26.0				1000								26.0
	4	4	4	4	6	4	4	4	4	3	3	
	2#	50	50	50	50	100	100	100	100	100	100	2#
	3#	50	67	83	100	0	17	33	50	67	83	100
	4#	50	67	83	100	0	17	33	50	67	83	100
	5#	50	67	83	100	0	17	33	50	67	83	100
	35	39	46	48	0	28	41	44	50	54	55	
	800	800	800	800	1000	800	800	800	800	800	800	
	80	80	80	80	80	80	80	80	80	80	80	

Load Chart-Telescopic Boom

性能表 - 主臂

Unit: kg



 m	12.2	16.6	20.8	25.3	29.7	33.9	38.3	16.6	21.0	25.2	 m
3.0	37000	22700	21500					31500	22500		3.0
3.5	26500	21600	20000					23800	21000		3.5
4.0	20000	19800	19200	19000				19000	19200	19500	4.0
4.5	15500	17500	17000	16500				16000	16300	16500	4.5
5.0	12500	15000	14800	14500	15000			13500	13600	13800	5.0
5.5	10200	12500	13100	13000	12900			11500	11600	11800	5.5
6.0	8500	11300	11400	11500	11600	11800		10000	10500	10800	6.0
6.5	7000	9800	10200	10300	10400	10500	10500	8300	8900	9100	6.5
7.0	5000	8700	9000	9200	9300	9600	9700	6800	7500	7600	7.0
7.5	3400	7600	8000	8200	8400	8700	8800	5500	6000	6100	7.5
8.0	2200	6500	7000	7200	7500	8000	8100	4300	5200	5400	8.0
9.0	1300	5000	5600	5900	6100	6500	6600	3200	3900	4000	9.0
10.0		3800	4300	4500	5000	5400	5500	2400	2700	2800	10.0
11.0		3000	3500	3600	4200	4500	4600	1600	2100	2300	11.0
12.0		2300	2400	2500	3400	3700	3800	1000	1700	1700	12.0
14.0		1400	1600	1800	2400	2600	2700			1100	14.0
16.0			1000	1100	1700	2000	2000				16.0
18.0					1100	1300	1400				18.0
	8	6	4	4	4	4	4	6	4	4	
 2#	0	0	0	0	0	0	0	50	50	50	2#
 3#	0	17	33	50	67	83	100	0	17	33	3#
 4#	0	17	33	50	67	83	100	0	17	33	4#
 5#	0	17	33	50	67	83	100	0	17	33	5#
 Min Max	0	0	29	43	47	53	57	32	47	50	 Min Max
 Min Max kg	3000	1000	800	800	800	800	800	800	800	800	 Min Max kg
 Min Max	76	78	80	80	80	80	80	80	80	80	 Min Max

Load Chart-Telescopic Boom

性能表 - 主臂


Unit: kg



 m	29.6	34.0	38.2	42.7	20.9	25.3	29.5	34.0	38.4	42.6	47.0	 m
3.0					27500							3.0
3.5					23000							3.5
4.0					21000	20500						4.0
4.5					16200	16000						4.5
5.0	14000				12300	12600	13000					5.0
5.5	12000				10000	10500	11500					5.5
6.0	11000	11300			8000	8800	10000	10800				6.0
6.5	9300	9500	10000		6400	6500	9000	9300	9500			6.5
7.0	8000	8200	8500		4800	5500	7600	8000	8200			7.0
7.5	6500	6700	7000	7300	3800	4500	6200	6700	7000	7500		7.5
8.0	5600	5700	5800	6000	3000	3800	5000	5200	5400	5600	5800	8.0
9.0	4300	4400	4500	4700	2000	2800	3200	3600	3800	4000	4200	9.0
10.0	2900	3000	3600	3800	1300	2000	2300	2600	2800	3000	3200	10.0
11.0	2400	2700	3000	3100		1300	1600	1800	2100	2300	2600	11.0
12.0	1800	1800	2000	2500			1200	1400	1600	1900	2200	12.0
14.0	1100	1200	1200	1400						1300	1400	14.0
16.0				1000								16.0
18.0												18.0
	4	4	4	4	6	4	4	4	4	3	3	
2#	50	50	50	50	100	100	100	100	100	100	100	2#
3#	50	67	83	100	0	17	33	50	67	83	100	3#
4#	50	67	83	100	0	17	33	50	67	83	100	4#
5#	50	67	83	100	0	17	33	50	67	83	100	5#
	56	57	64	64	54	58	61	65	67	67	69	
	800	800	800	800	800	800	800	800	800	800	800	
	80	80	80	80	80	80	80	80	80	80	80	

Operating Range - Fixed Jib


起升高度曲线 - 副臂

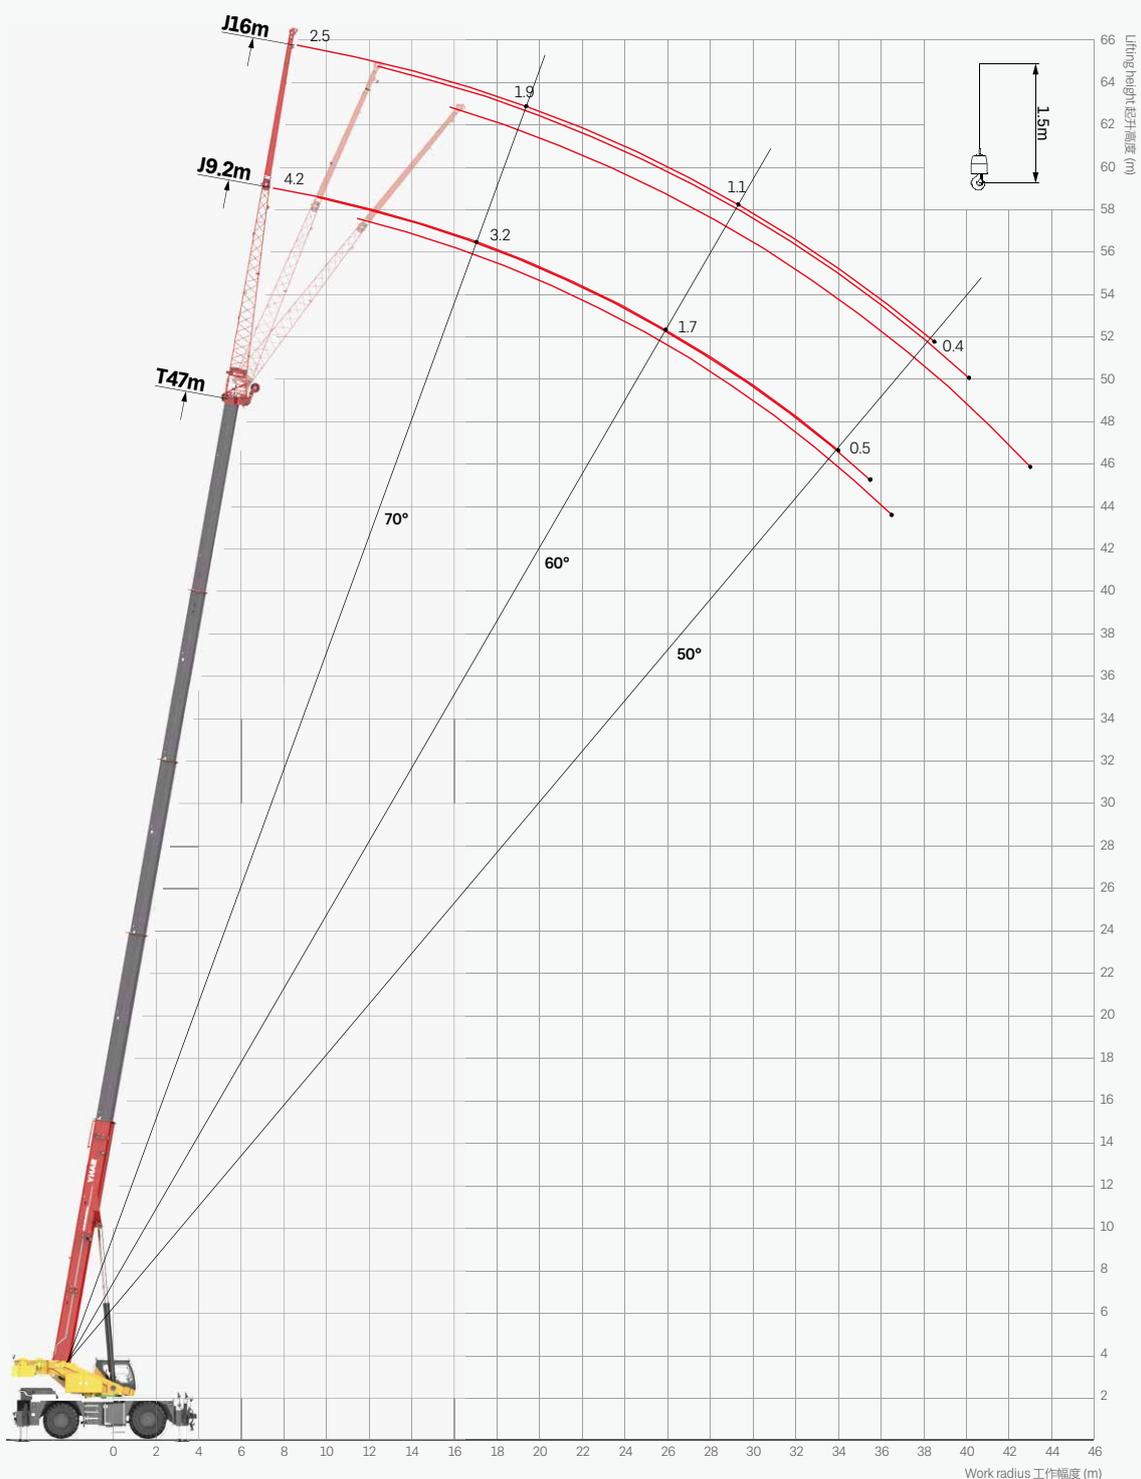

Load Chart - Fixed Jib

性能表 - 副臂

Unit: kg



	47.0m + 9.0m			47.0m + 16.0m			
	0°	15°	30°	0°	15°	30°	
80	4200	2800	2500	2500	1600	1200	80
78	4100	2700	2400	2400	1600	1200	78
76	4000	2600	2400	2300	1500	1150	76
74	3850	2500	2300	2200	1400	1100	74
72	3600	2300	2200	2100	1300	1050	72
70	3200	2200	2100	1900	1200	1000	70
68	3000	2000	2000	1700	1150	950	68
66	2600	1900	1900	1500	1100	900	66
64	2300	1800	1800	1400	1050	850	64
62	2000	1700	1500	1300	1000	800	62
60	1700	1500	1200	1100	900	750	60
58	1300	1100	900	950	800	650	58
56	1100	1000	800	850	750	600	56
54	800	750	650	700	600	500	54
52	700	700	600	550	550	400	52
50	500	500	450	400	350	300	50
	1						
	48						
	350	300	250	250	200	200	

Load Chart - Telescopic Boom, On Tires Stationary, Load Over Front

性能表 - 轮胎静止吊载 (正前方)




Unit: kg

 m	12.2	16.6	20.8	25.3	29.7	 m	
3.0	21000	17000	16000			3.0	
3.5	19200	16000	15000			3.5	
4.0	17300	15000	14000	13000		4.0	
4.5	15500	14000	13000	12000		4.5	
5.0	14000	12500	12000	11300	11000	5.0	
5.5	11800	11000	10700	10300	10000	5.5	
6.0	9900	10000	9800	9700	9500	6.0	
6.5	8400	8800	9000	8800	8700	6.5	
7.0	7200	7500	8000	7800	7600	7.0	
7.5	6300	6500	7000	6900	6800	7.5	
8.0	5300	5700	6400	6200	6100	8.0	
9.0	4500	5000	5200	5400	5300	9.0	
10.0		3600	3900	4500	4600	10.0	
11.0		3000	3200	3800	4000	11.0	
12.0		2200	2300	3000	3500	12.0	
14.0				2200	2300	14.0	
16.0						16.0	
	4	4	4	4	4		
	2#	0	0	0	0	2#	
	3#	0	17	33	50	67	3# 
	4#	0	17	33	50	67	4#
	5#	0	17	33	50	67	5#
 Min	0	32	47	50	56	 Min	
 Min 	2000	800	800	800	800	 Min 	
 Max	80	80	80	80	80	 Max	

Load Chart - Telescopic Boom, Pick & Carry, Load Over Front

性能表 - 主臂帶載行駛 (正前方)

Unit: kg



 m	12.2	16.6	20.8	25.3	29.7	 m	
3.0	18000	14000	13000			3.0	
3.5	16000	13000	12000			3.5	
4.0	14000	12000	11500	11000		4.0	
4.5	12000	10800	10400	10000		4.5	
5.0	10400	10300	9900	9500	9000	5.0	
5.5	9000	9200	8900	8500	8000	5.5	
6.0	7800	8000	7600	7400	7300	6.0	
6.5	6800	7100	6800	6700	6500	6.5	
7.0	6000	6100	6000	5900	5800	7.0	
7.5	5200	5300	5400	5500	5400	7.5	
8.0	4500	4700	4800	4900	5000	8.0	
9.0	3000	3800	4000	4100	4200	9.0	
10.0		3100	3400	3500	4000	10.0	
11.0		2500	2700	3000	3500	11.0	
12.0		1800	2000	2400	2700	12.0	
14.0						14.0	
 T _n	4	4	4	4	4	 T _n	
	2#	0	0	0	0	2#	
	3#	0	17	33	50	67	3# 
	4#	0	17	33	50	67	4#
	5#	0	17	33	50	67	5#
	 Min	0	32	47	50	56	 Min
 Min 	800	800	800	800	800	 Min 	
 Max	80	80	80	80	80	 Max	

Load Chart - Telescopic Boom, On Tires Stationary, 360° Slewing

性能表 - 轮胎静止吊载 (360°)



Unit: kg

 m	12.2	16.6	20.8	25.3	29.7	 m
3.0	12000					3.0
3.5	11000					3.5
4.0	10500	10000				4.0
4.5	8600	8200	8000	6500		4.5
5.0	7000	6500	6000	5600	5500	5.0
5.5	5800	5500	5000	4900	4800	5.5
6.0	4300	4200	4100	4000	3900	6.0
6.5	3000	3100	3200	3300	3500	6.5
7.0	2500	2600	2700	2800	3000	7.0
7.5	2000	2100	2200	2300	2500	7.5
8.0					2000	8.0
9.0						9.0
	4	4	4	4	4	
	0	0	0	0	0	
	0	17	33	50	67	
	0	17	33	50	67	
	0	17	33	50	67	
	39	55	62	67	69	
	800	800	800	800	800	
	68	72	74	76	78	

Remark

- Capacities are applicable at 525kPa cold tire inflation pressure.
- Capacities are applicable only with machine on firm level surface.
- On tire lifting with the jib mounted is not permitted.
- Axle lockouts must be applied when lifting on tires.
- Parking brake must be applied when lifting on tires stationary.
- Driving speed shall be ≤4km/h at pick & carry mode.

- 冷态轮胎气压需保持 525kPa。
- 起重机需在平整坚固的地面上作业。
- 轮胎吊载工况不允许使用副臂吊载。
- 轮胎吊载工况中，车桥悬挂需锁定。
- 轮胎静止吊载工况中，需使用驻车制动。
- 带载行驶工况中，直线行驶速度需小于等于 4km/h。



**ТЕХНИКА
СЕРВИС
ЗАПЧАСТИ**

ОФИЦИАЛЬНЫЙ ДИЛЕР

ТРАКТОРОДЕТАЛ.РУ

8 800 100-77-66

